

New!




SUGINO for OX901D Adjustable FD MOUNT (MT-OX)

- Japanese patent pending -


- Adapter to mount braze-on front derailleur lower.
- For SHIMANO 11 speed front derailleur (New DURA-ACE : FD-R9100-F compatible)

Tool required : T20 hexalobular wrench
(= torx wrench)


When **OX901D with 44T outer ring** is installed

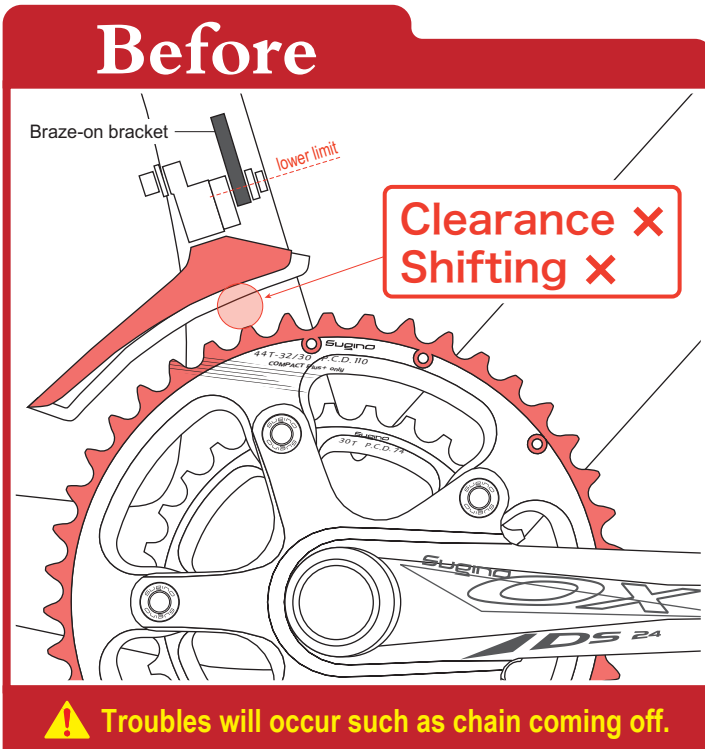

FD cannot be adjusted low enough. If gap between FD and outer ring is too wide, FD won't work correctly. It may cause damage to other parts and even result in serious accidents.

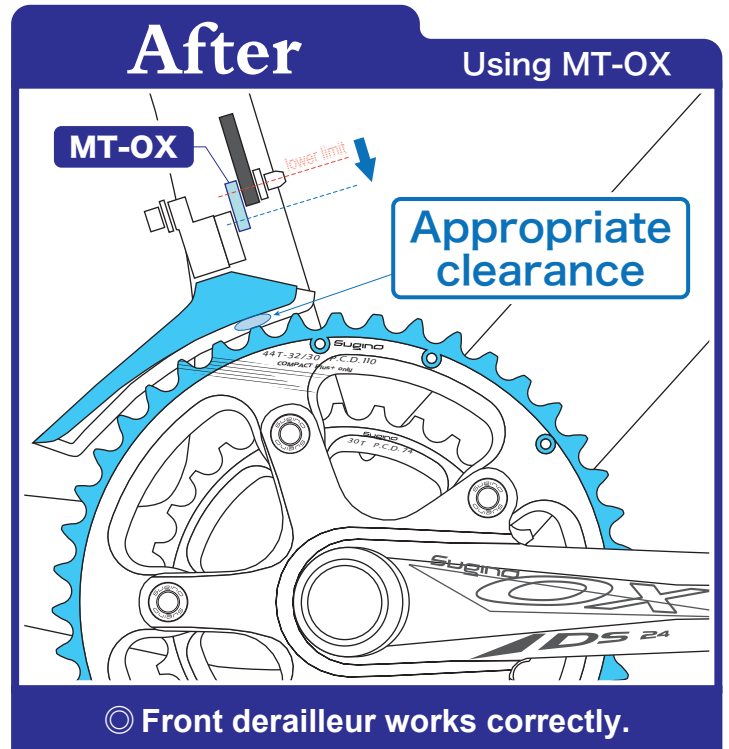

MT-OX allows lower FD mounting to accommodate OX901D compact rings. Proper FD position helps you to get the most performance, comfort and safety.

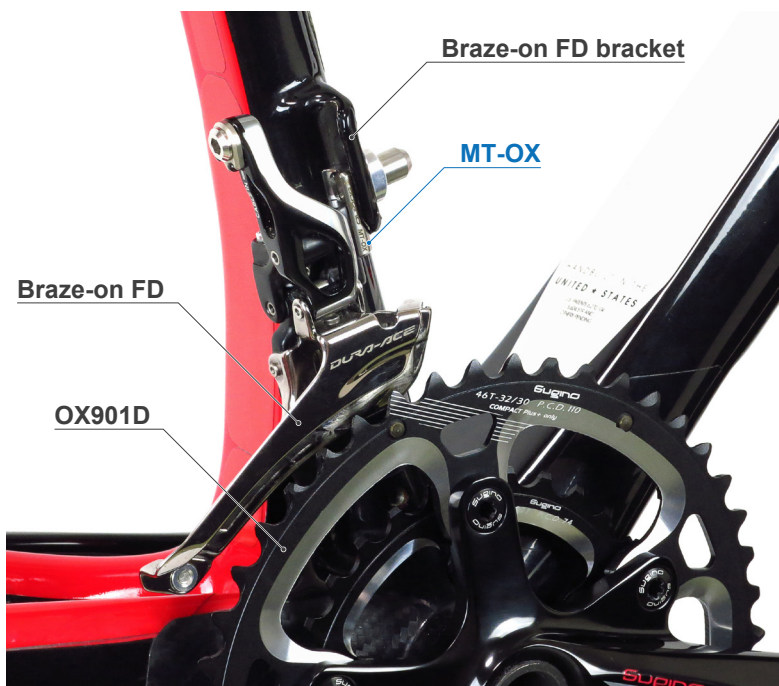

Front Derailleur Position for installing Chainwheel

Before installation, please measure the A and B dimensions as shown in the illustration and check them to make sure that they meet dimensional requirements in the table below.

	Teeth number of outer chainring							
	56T	54T	53T	52T	50T	48T	46T	44T
A dimension (from center of BB to front end of FD)	117 mm	113 mm	111 mm	109 mm	105 mm	101 mm	97 mm	93 mm
B dimension (from chain stay to rear end of FD)	2mm or more							

If you have questions regarding installation and handling, please contact a professional. Incorrect installation and setting may damage the parts and lead to serious accidents.

